

- Braided from .15 mil PET Monofilament
- Extreme Abrasion & Cut Resistance
- UV Resistant
- Resists Gasoline, Solvents, Salt Water and Chemicals
- Temp Range -75°C to 125°C
- Melt Temp 230°C

50% Thicker For The Really Abrasive Jobs



When your application calls for more protection than our 10 mil products provide, our 15 mil HW is the ideal solution.


HW is commonly used in industrial and marine applications where extreme abrasion protection is critical. The durability of HW makes it ideal for protecting hoses and cables that have to withstand constant contact with rough and abrasive surfaces.

HW is the perfect solution for use on chains and cables to protect painted or laminated surfaces from scuffing and wear.



HW protects trailer hitch harnesses from abrasion, flying debris and UV damage without affecting flexibility or trapping moisture like convoluted tubing.

MARINE INDUSTRY PROVEN FOR OVER 30 YEARS

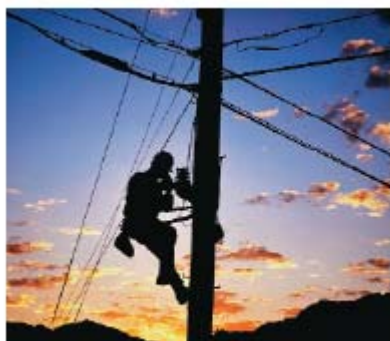

HW is ideal for protecting exposed overhead wires from damage caused by UV, snow & ice and rodents.



Nominal Size	Part #	Expansion Range		Standard Spool Put-Ups		Available Colors	Lbs/100'
		Min.	Max.	Bulk Spool	Mini Spool		
3/8"	HWN0.38	3/16"	3/4"	500'	100'	3 available colors	.82
5/8"	HWN0.63	5/16"	1"	250'	75'	3 available colors	1.1
1"	HWN1.00	1/2"	1 1/2"	250'	50'	3 available colors	1.6
1 1/2"	HWN1.50	3/4"	2"	250'	50'	3 available colors	2.5
2"	HWN2.00	1 1/2"	3"	200'	50'	3 available colors	3.4
3"	HWN3.00	2"	4"	100'	50'	3 available colors	4.2
4"	HWN4.00	2 1/2"	5 1/2"	100'	50'	3 available colors	6.5

Source Associates, Inc.

(408)970-0128 Fax (408)970-9748

www.source.as e-mail: sales@source.as