


- Mil-202, FAR 25, FMVSS 302, VW-1, FR-1 Approved
- Economical & Easy to Install
- Cut & Abrasion Resistant
- Expands up to 150%
- Halogen Free
- Resists Gasoline and Engine Chemicals
- Temp Range -75°C to 125°C
- Melt Temp 250°C

Flame Retardant, Economical Sleeving Solution

FLEXO PET FLAME RETARDANT (FR) sleeving is the perfect choice for electronic and high tech applications where flame retardance and durability are primary concerns. Ease of installation makes FR an efficient choice for long runs wire or cable.

The addition of an organic combustion inhibitor to our standard polyethylene terephthalate gives FR an Underwriters Lab and CSA flame resistance rating of VW-1

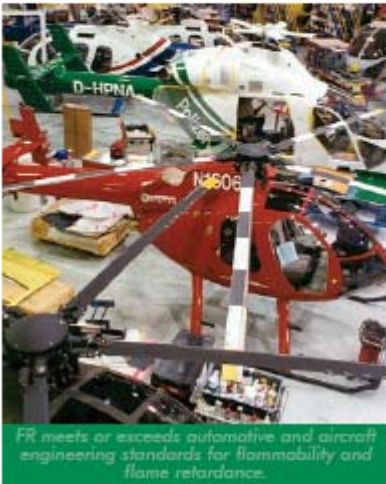

Nominal Size	Part #	Expansion Range		Standard Spool Put-Ups		Available Colors	Lbs/100'
		Min.	Max.	Bulk Spool	Mini Spool		
1/8"	FRN0.13	3/32"	1/4"	1,000'	225'	2 in-stock colors	.16
1/4"	FRN0.25	1/8"	7/16"	1,000'	200'	2 in-stock colors	.24
3/8"	FRN0.38	3/16"	5/8"	500'	125'	2 in-stock colors	.57
1/2"	FRN0.50	1/4"	3/4"	500'	100'	2 in-stock colors	.77
3/4"	FRN0.75	1/2"	1 1/4"	250'	75'	2 in-stock colors	1.2
1 1/4"	FRN1.25	3/4"	1 3/4"	250'	50'	2 in-stock colors	1.6
1 1/2"	FRN1.50	1"	2 1/2"	200'	40'	2 in-stock colors	1.96
1 3/4"	FRN1.75	1 1/4"	2 3/4"	200'	30'	2 in-stock colors	2.7
2"	FRN2.00	1 1/2"	3 1/2"	200'	50'	2 in-stock colors	3.3
2 1/2"	FRN2.50	1 3/4"	4 1/2"	200'	50'	2 in-stock colors	3.8
3"	FRN3.00	2 1/2"	4 3/4"	100'	50'	2 in-stock colors	4.0

Source Associates, Inc.
 (408)970-0128 Fax (408)970-9748
 www.source.as e-mail: sales@source.as